


1. ALL DIMENSIONS ARE IN mm WITH ±0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE, REFLECTIVE
4. DISPLAY TYPE: TN
5. CONNECTION: PIN
6. FLUID SPECIFICATION:  
 DRIVING VOLTAGE: 3.0V  
 MULTIPLEX LEVEL: STATIC  
 OPERATING TEMP: -20°C ~ +70°C  
 STORAGE TEMP: -20°C ~ +70°C


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM	1E	1D	1C	DP1	2E	2D	2C	DP2	3E	3D	3C	DP3	COM
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM	COM	3B	3A	3F	3G	2B	2A	2F	2G	1B	1A	1F	1G

**厦门胜峰电子有限公司**


**Vs-Top Electronics Co., Ltd.**

客户确认:	绘图:	绘图编号: VSTP-0717	单位: mm
	审核:	客户编号:	日期: 2004.03.05
	批准:	图纸版号: 02	页数: 1/3



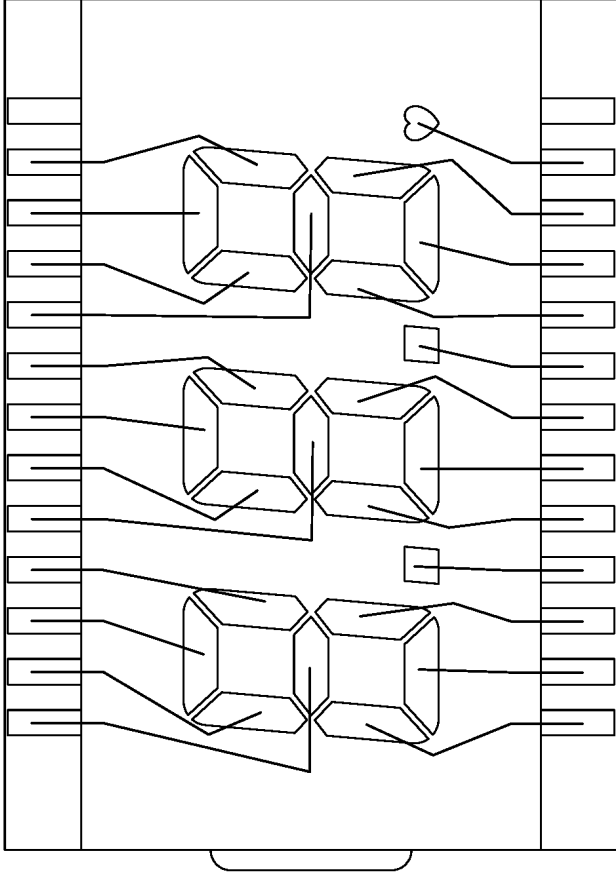

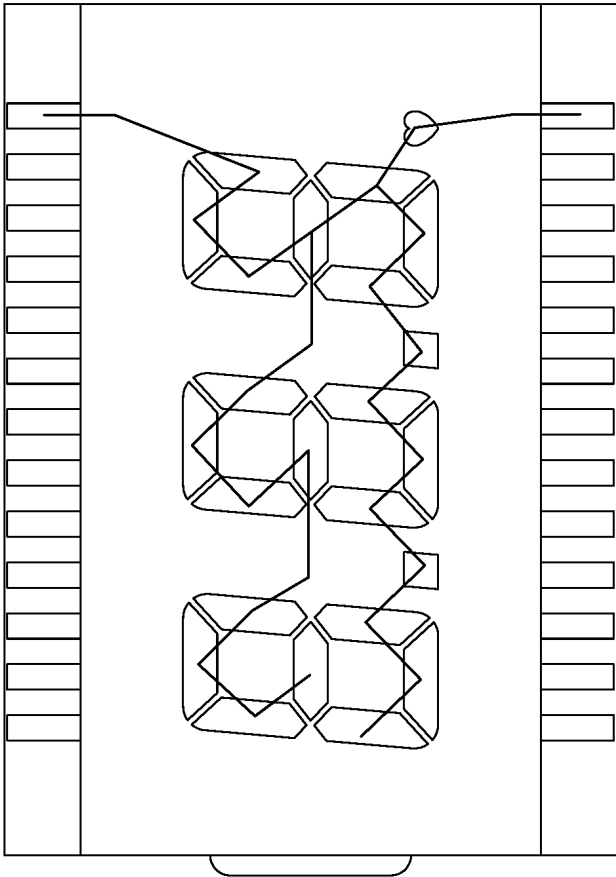


## SEG




## COM

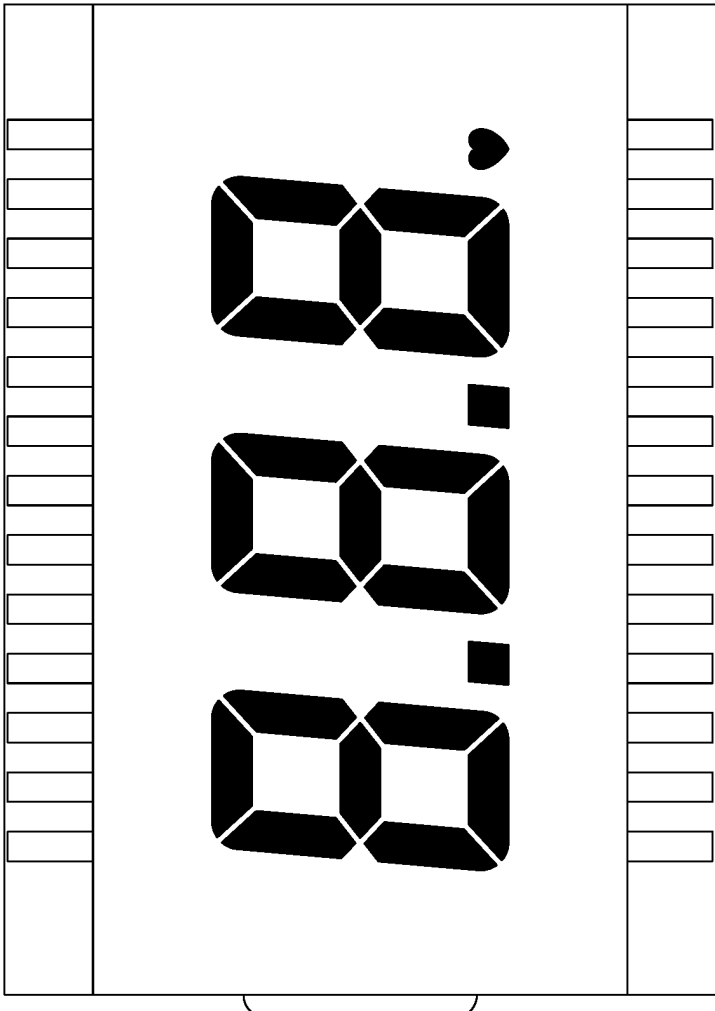


客户确认:	绘图:	Vs-Top Electronics Co., Ltd.			
	审核:	客户编号: VSTP-0717			单位: mm
	批准:	客户编号:			日期: 2004.03.05
		图纸版号: 02		页数: 2/3	

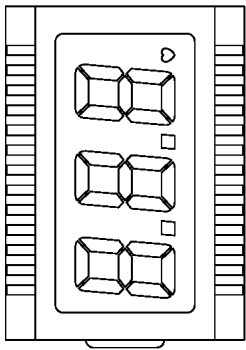

**FULL DISPLAY**



( 1 : 1 )

	<b>厦门胜峰电子有限公司</b>			
	<b>Vs-Top Electronics Co.,Ltd.</b>			
	客户确认:	绘图编号: <b>VSTP-0717</b>		
	审核:	客户编号:	日期: <b>2004.03.05</b>	
	批准:	图纸版本号: <b>02</b>	页数: <b>3/3</b>	