

PIN	1	2	3	4	5	6	7	8	9	10	11	12
COM1	1F	1A	2F	2A	3F	3A	4F	4A	COM1	--	--	--
COM2	1G	1B	2G	2B	3G	3B	4G	4B	--	COM2	--	--
COM3	1E	1C	2E	2C	3E	3C	4E	4C	--	--	COM3	--
COM4	--	1D	--	2D	P2	3D	--	4D	--	--	--	COM4


1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE REFLECTIVE
4. DISPLAY TYPE: TN
5. CONNECTION:
6. FLUID SPECIFICATION:
 DRIVING VOLTAGE: 4.5V
 MULTIPLEX LEVEL: 1/4 DUTY, 1/3 BIAS
 OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 STORAGE TEMP: $-25^{\circ}\text{C} \sim +75^{\circ}\text{C}$



厦门胜峰电子有限公司



Vs-Top Electronics Co., Ltd.

客户确认:	绘图:	绘图编号: VSTP-1487	单位: mm
	审核:	客户编号:	日期: 2004.03.05
	批准:	图纸版本号: 02	页数: 1/3



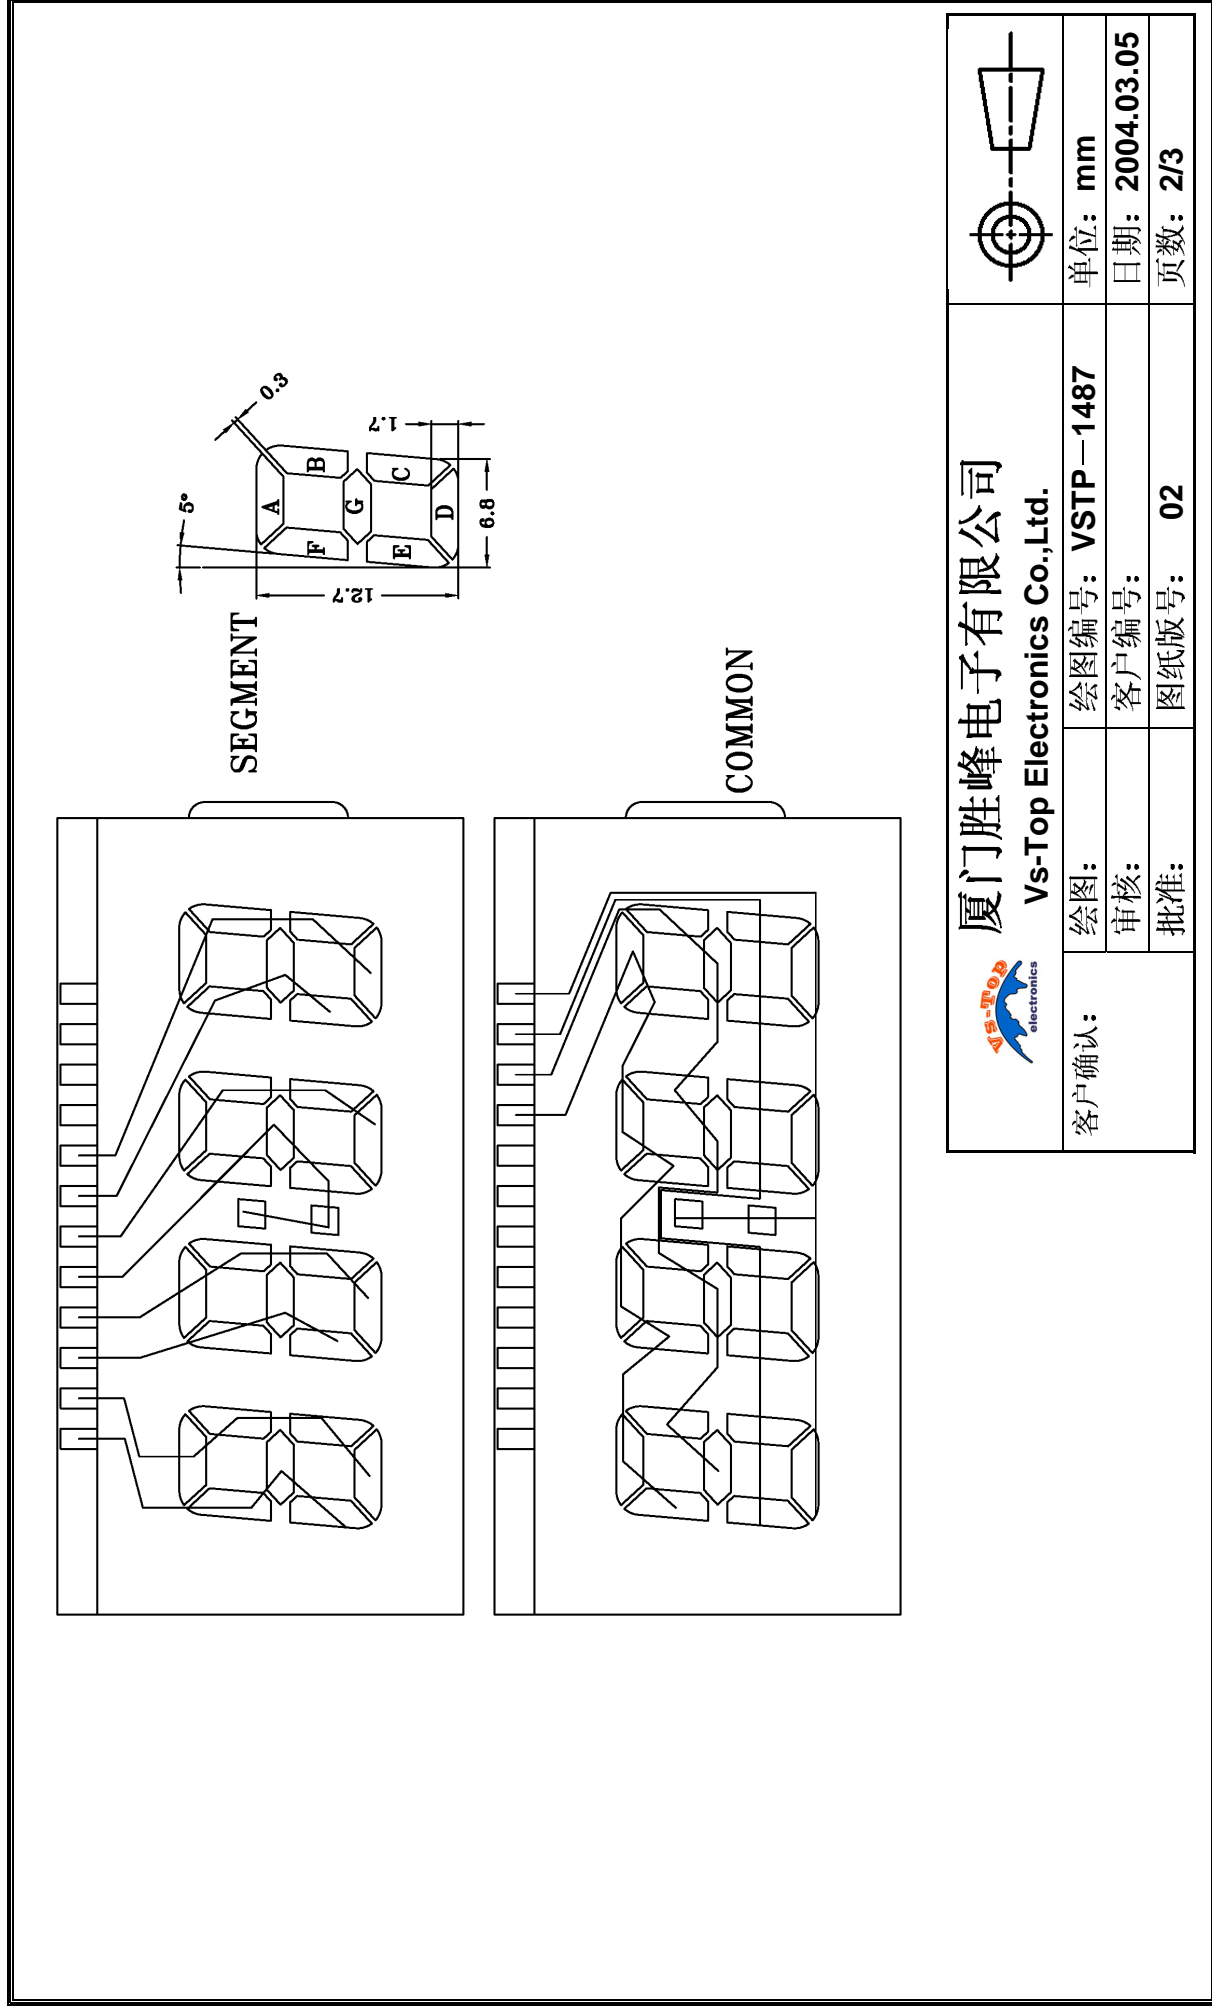

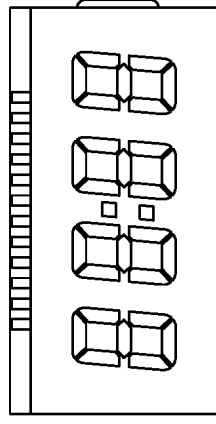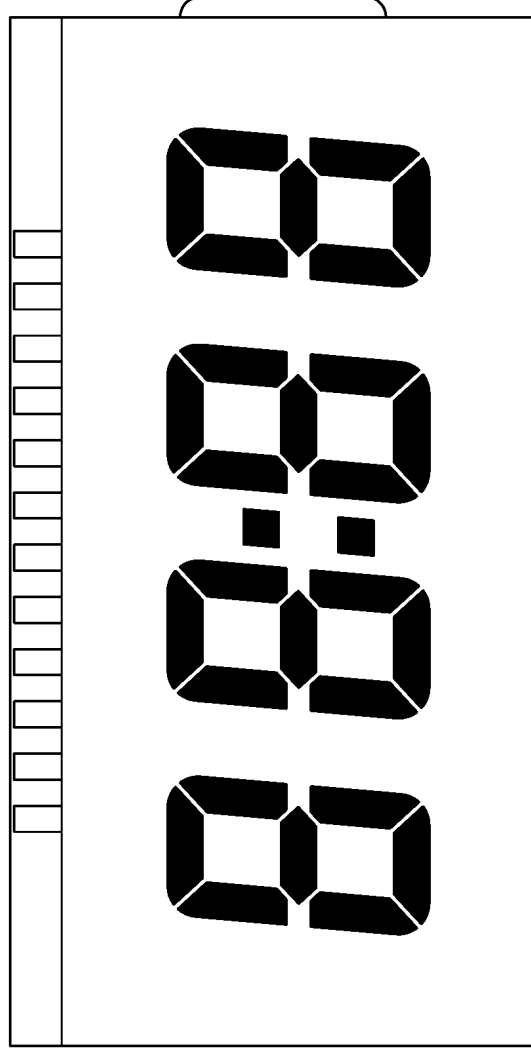


		厦门胜峰电子有限公司 Vs-Top Electronics Co., Ltd.		
		客户确认:	绘图编号: VSTP-1487	
		审核:	客户编号:	日期: 2004.03.05
		批准:	图纸版本号: 02	页数: 2/3



1:1

FULL DISPLAY

客户确认:	绘图:	厦门胜峰电子有限公司 Vs-Top Electronics Co.,Ltd.		
	审核:	绘图编号: VSTP-1487	单位: mm	
	批准:	客户编号:	日期: 2004.03.05	
		图纸版本号: 02	页数: 3/3	