


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM0	1A	1F	2A	2F	3A	3F	4A	4F	5A	5F	6A	6F	7A	7F	COM0	--	--	--
COM1	1B	1G	2B	2G	3B	3G	4B	4G	5B	5G	6B	6G	7B	7G	--	COM1	--	--
COM2	1C	1E	2C	2E	3C	3E	4C	4E	5C	5E	6C	6E	7C	7E	--	--	COM2	--
COM3	--	1D	2P	2D	3P	3D	--	4D	--	5D	--	6D	--	7D	--	--	--	COM3

1. ALL DIMENSIONS ARE IN mm WITH ±0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE ,REFLECTIVE
4. DISPLAY TYPE: TN
5. CONNECTION TYPE: PIN
6. FLUID SPECIFICATION:
DRIVING VOLTAGE: 5.0V
MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS
OPERATING TEMP: -10°C~+70°C
STORAGE TEMP: -20°C~+80°C


厦门胜峰电子有限公司



Vs-Top Electronics Co., Ltd.




客户确认:	绘图:	绘图编号: VSTP-2023	单位: mm
	审核:	客户编号:	日期: 2004.03.05
	批准:	图纸版号: 02	页数: 1/3

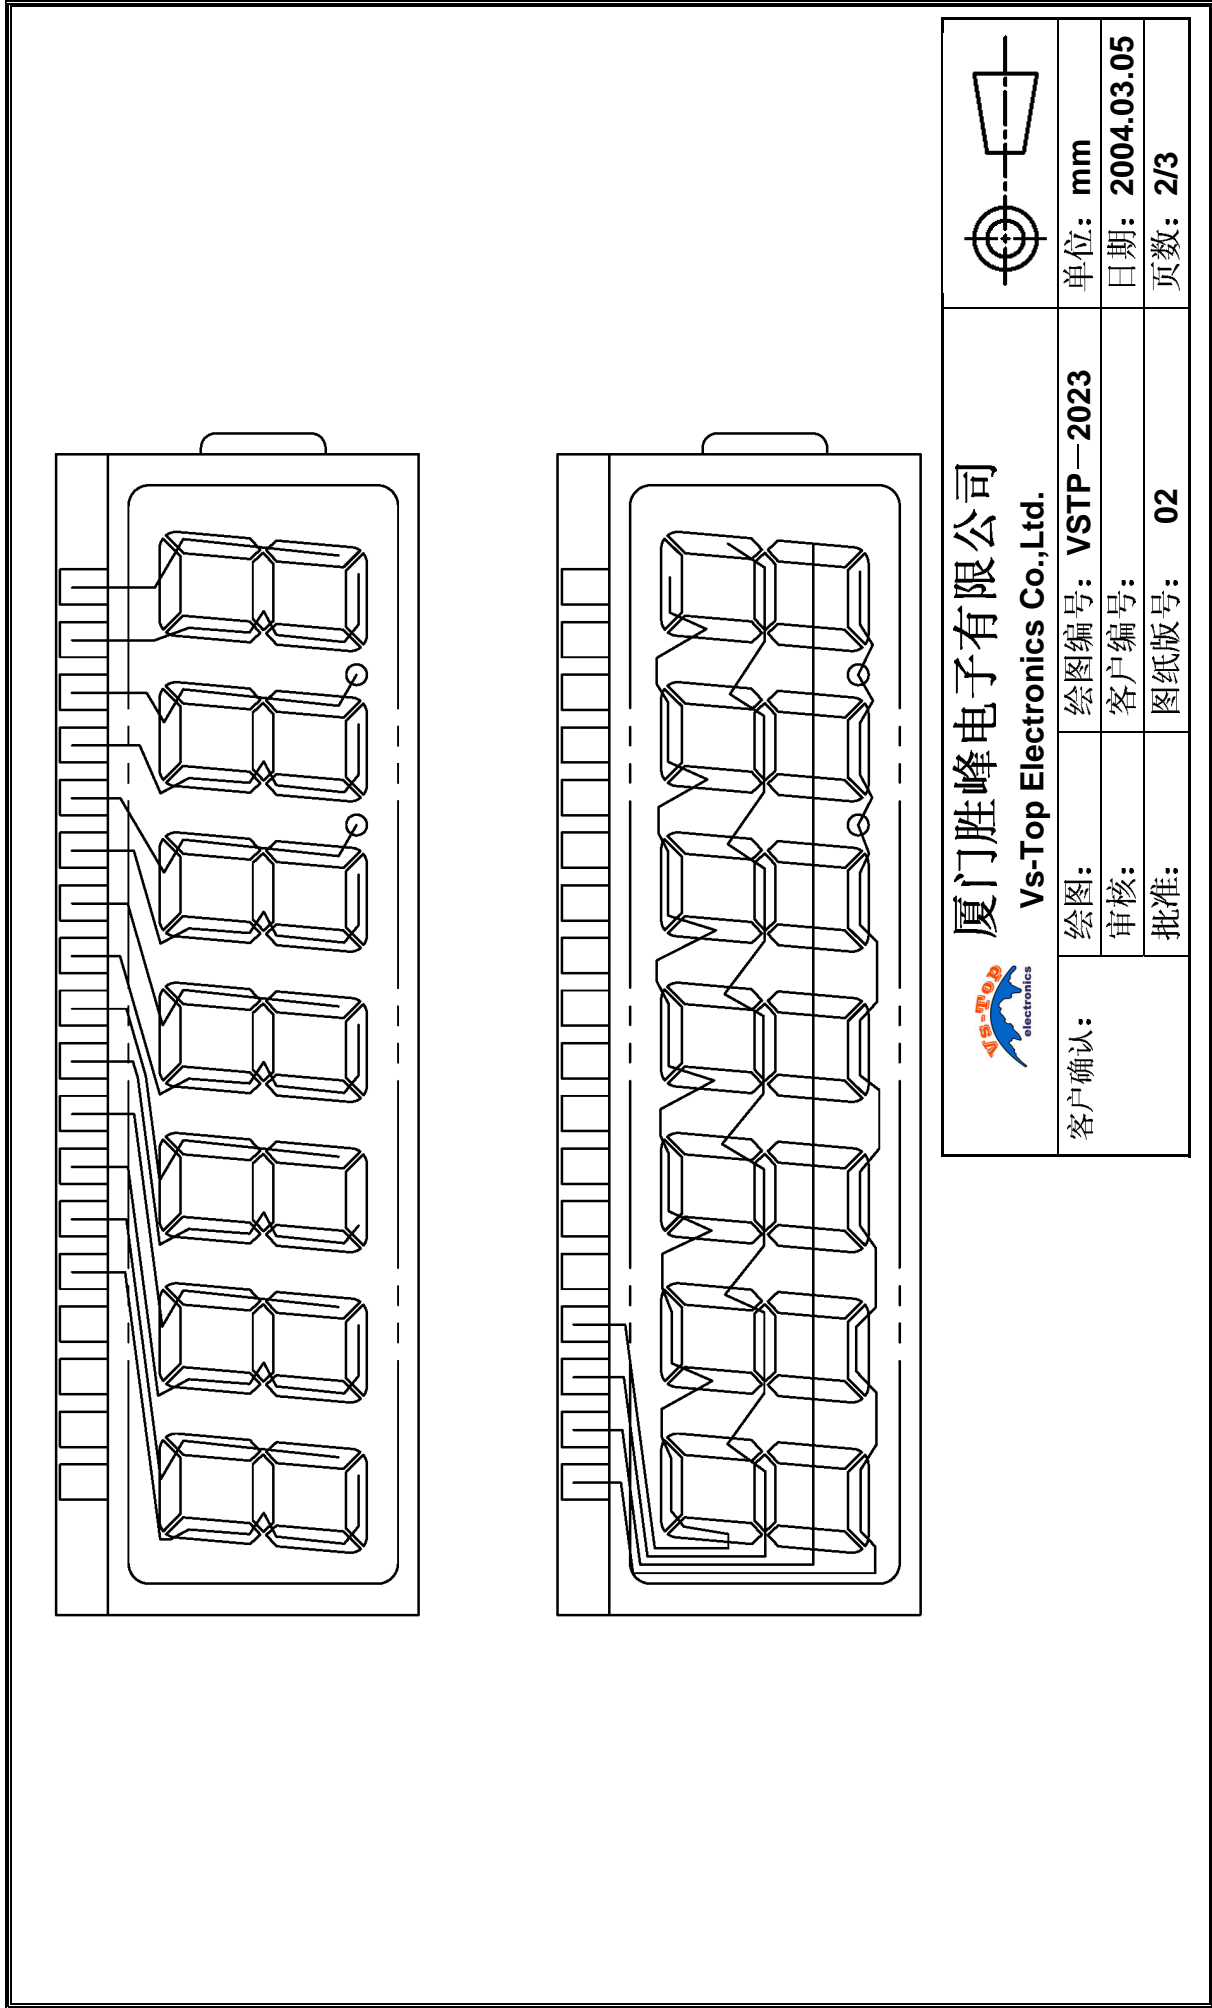

厦门胜峰电子有限公司

Vs-Top Electronics Co.,Ltd.



客户确认:

绘图: 绘图编号: VSTP-2023




单位: mm

审核:

日期: 2004.03.05

批准:

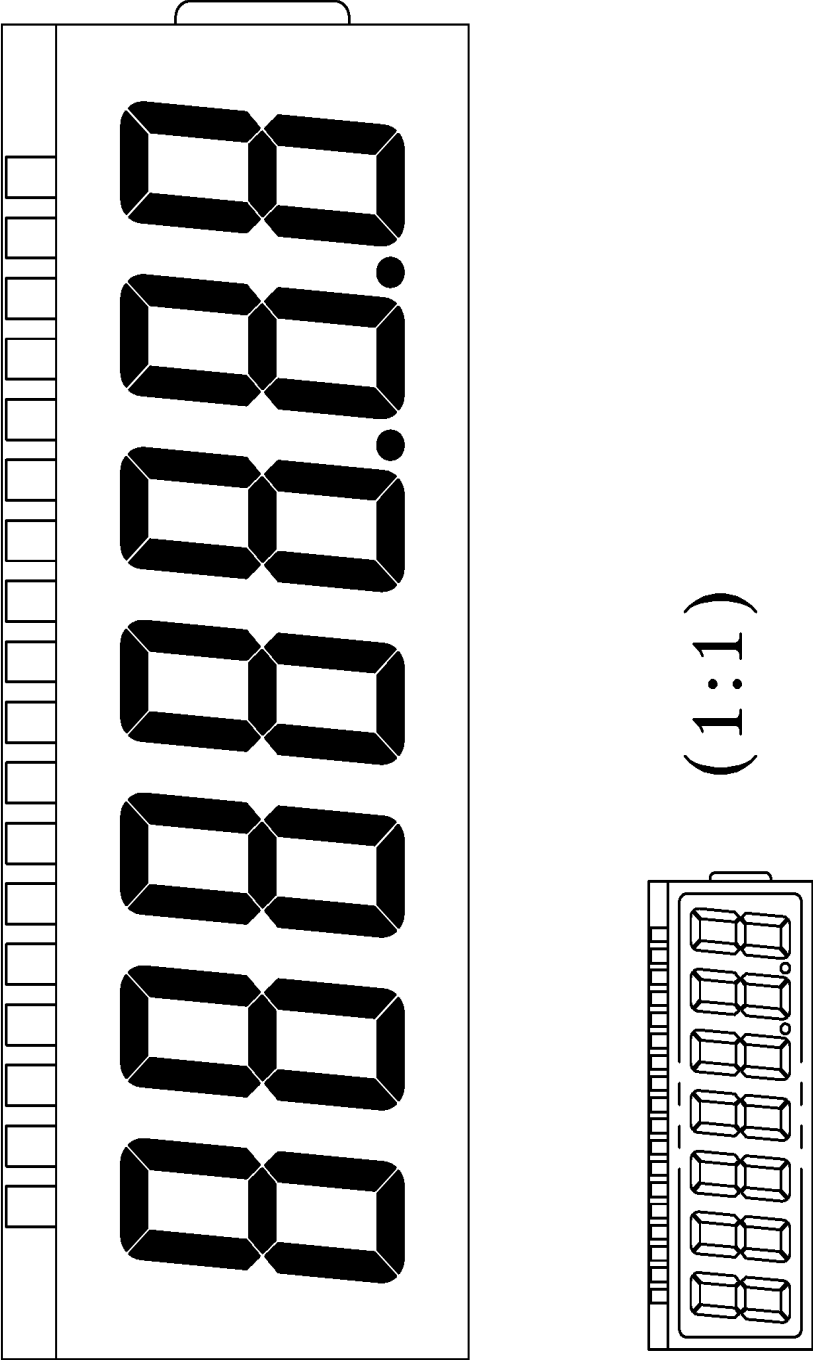页数: 2/3

 <p style="font-size: 2em; margin: 0;">(1 : 1)</p>	<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> <p>厦门胜峰电子有限公司</p> <p>Vs-Top Electronics Co.,Ltd.</p> </div>  </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 20%;">客户确认:</td> <td style="width: 20%;">绘图:</td> <td style="width: 20%;">绘图编号: VSTP-2023</td> <td style="width: 20%;">单位: mm</td> </tr> <tr> <td></td> <td>审核:</td> <td>客户编号:</td> <td>日期: 2004.03.05</td> </tr> <tr> <td></td> <td>批准:</td> <td>图纸版本号: 02</td> <td>页数: 3/3</td> </tr> </table>	客户确认:	绘图:	绘图编号: VSTP-2023	单位: mm		审核:	客户编号:	日期: 2004.03.05		批准:	图纸版本号: 02	页数: 3/3
客户确认:	绘图:	绘图编号: VSTP-2023	单位: mm										
	审核:	客户编号:	日期: 2004.03.05										
	批准:	图纸版本号: 02	页数: 3/3										