



● OUTLINE DIMENSION

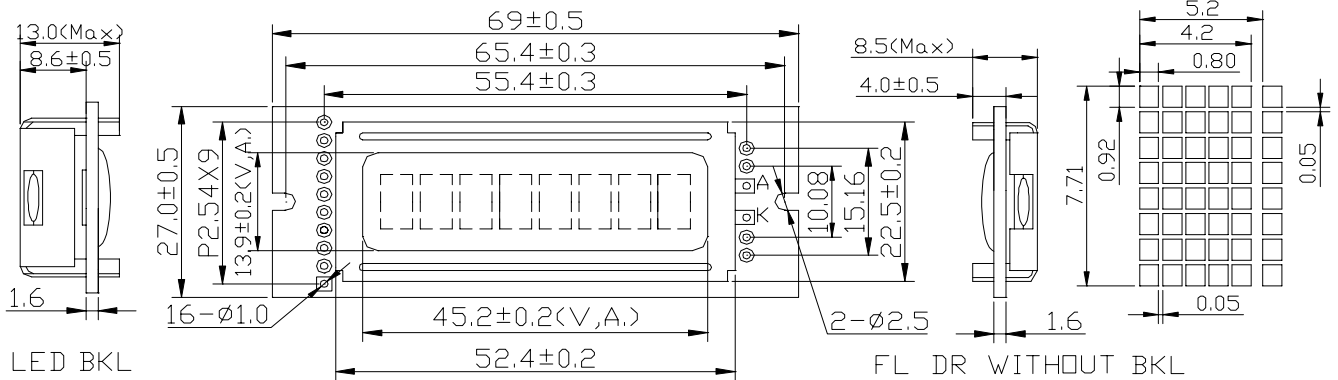

● BLOCK DIAGRAM & POWER SUPPLY

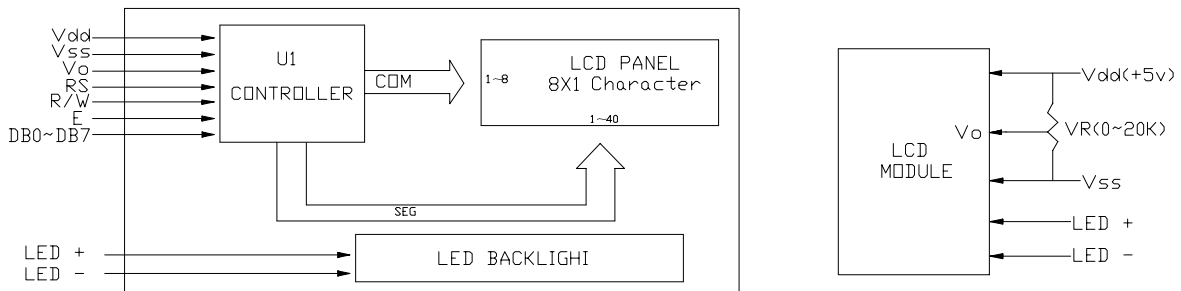

● MECHANICAL SPEC.&FEATURES

Item	Dimension(mm)
Module Size(WxHxT)	69.0x27.0x8.5/13.0
Viewing Area(WxH)	45.2x13.8
Dot Size(WxH)	0.80x0.92
Dot Pitch(WxH)	0.85x0.97
Character Size (WxH)	4.20x7.71
Character Pitch(WxH)	5.20x--

Features	
LC Fluid	TN,STN(Yellow-green,Gray,Blue),FSTN
Polarizer	Reflective,Transflective,Transmissive
View Angle	6:00 o'clock or 12:00 o'clock
Display Type	Positive or Negative
Backlight	LED(Optional)
Operating Temp.	0°C~50°C or -20°C~70°C
Controller	S6A0069 or Equivalent

● INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Function
1	Vss	Ground for logic
2	Vdd	Power supply for logic
3	Vo	Power supply for LCD
4	RS	Register selection(H:Data,L:Instruction)
5	R/W	Read/Write selection(H:R,L:W)

Pin No.	Symbol	Function
6	E	Enable signal
7~14	DB0~DB7	Data bus lines
	A	BKL+
	K	BKL-

● ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25°C	...	5.0	...	V
Operating Voltage for LCD	Vlcd	Ta=25°C	...	4.5	...	V
Supply Current	Idd	Ta=25°C,Vdd=5.0V	...	1.5	3.0	mA
Supply Voltage for LED	Vf	Ta=25°C,R=6.8Ω	...	4.2	...	V
Supply Current for LED	If	Ta=25°C,Vf=4.2V	...	80	...	mA